


2.1m High Heavy Duty Precast Concrete Wall

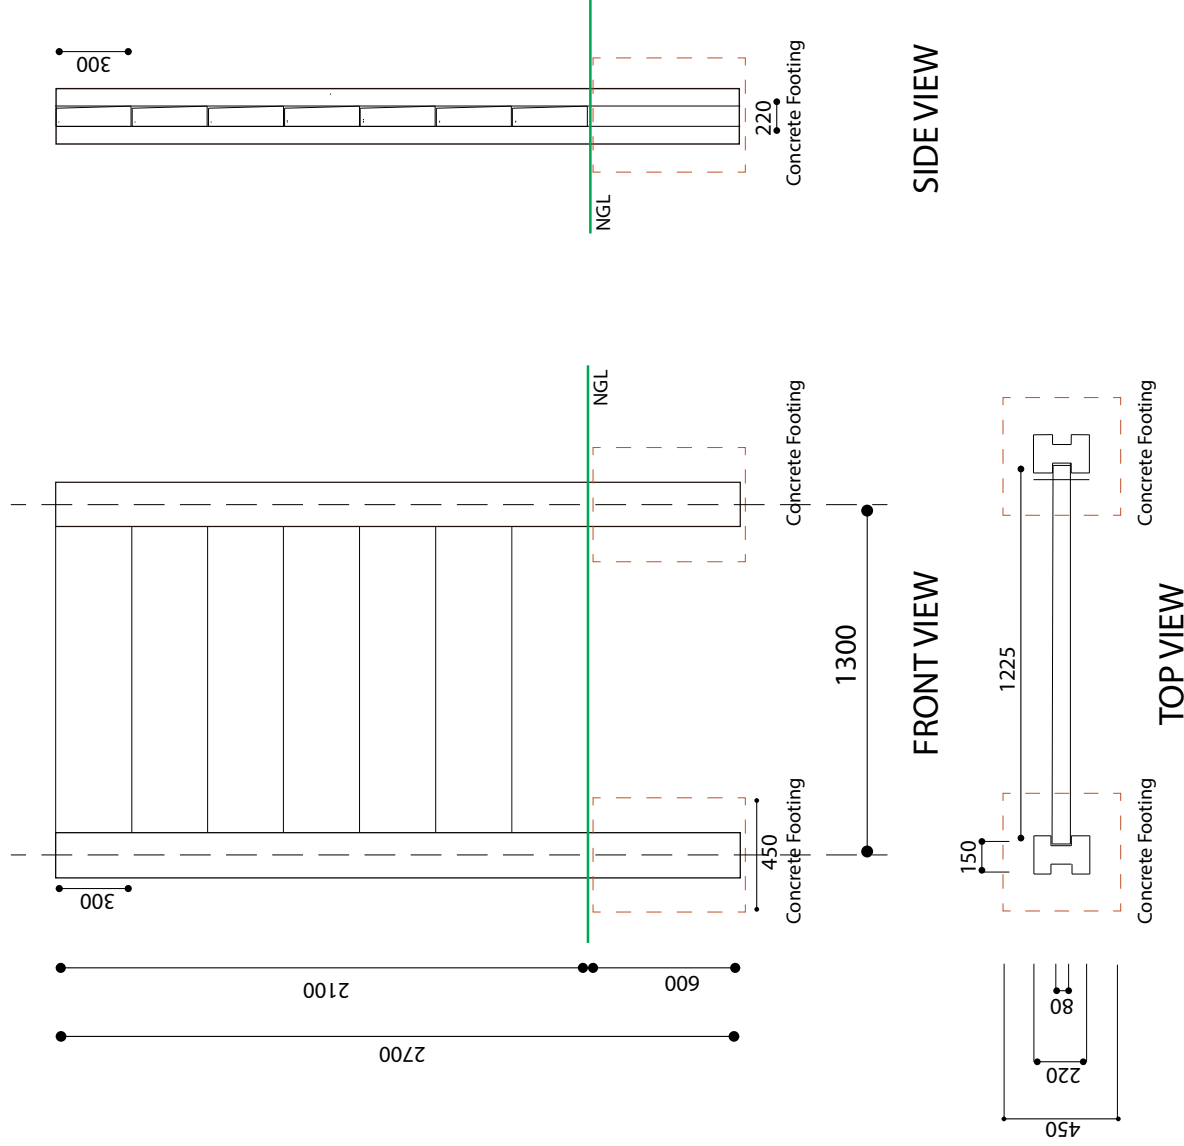

| | |
|--------------|--|
| Posts | 2700 x 150 x 220 |
| Slabs | 1225 x 300 x 80 |
| Concrete | Precast Items to be a minimum of 20-24 mpa at 28 days. |
| Installation | Foundations to be 450 x 450 x 600 deep. |
| | Minimum of 15-20 mpa concrete. |
| | The posts are spaced 1300mm centers. |
| | The final structure top 2 slabs to be grouted with sand / cement screed. |
| | Drainage as required. |