




**ERW  
CONCRETE  
PRODUCTS**

# 2.4m High Heavy Duty Precast Concrete Wall

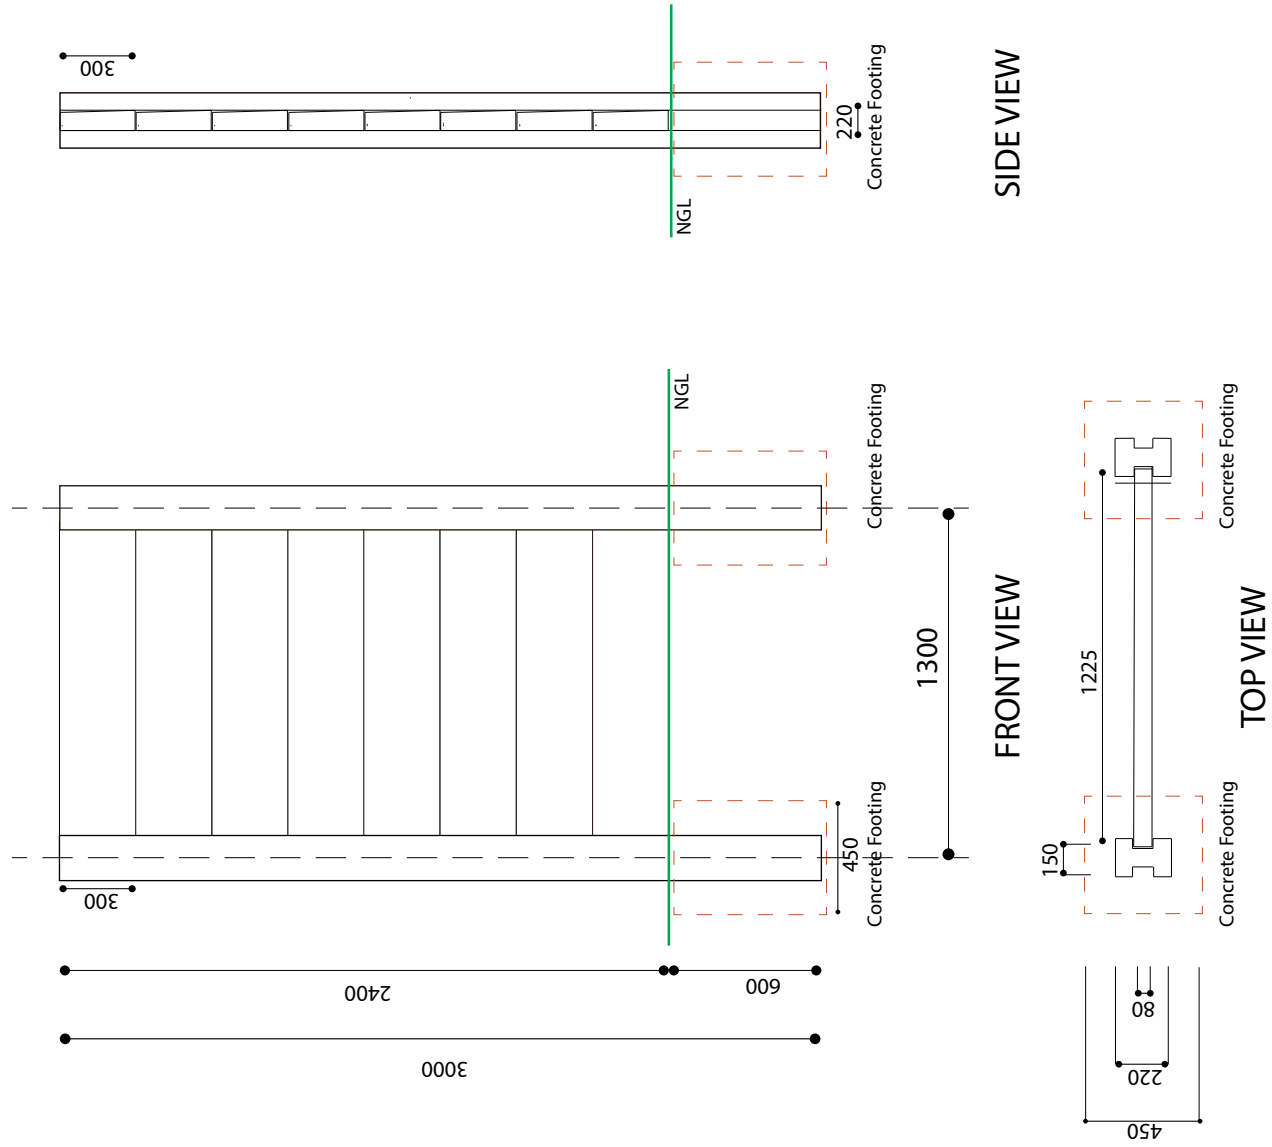

Posts	3000 x 150 x 220
Slabs	1225 x 300 x 80
Concrete	Precast Items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep.
	Minimum of 15-20 mpa concrete.
	The posts are spaced 1300mm centers.
	The final structure top 2 slabs to be grouted with sand / cement screed.
	Drainage as required.