


3.0m High Heavy Duty Precast Concrete Wall

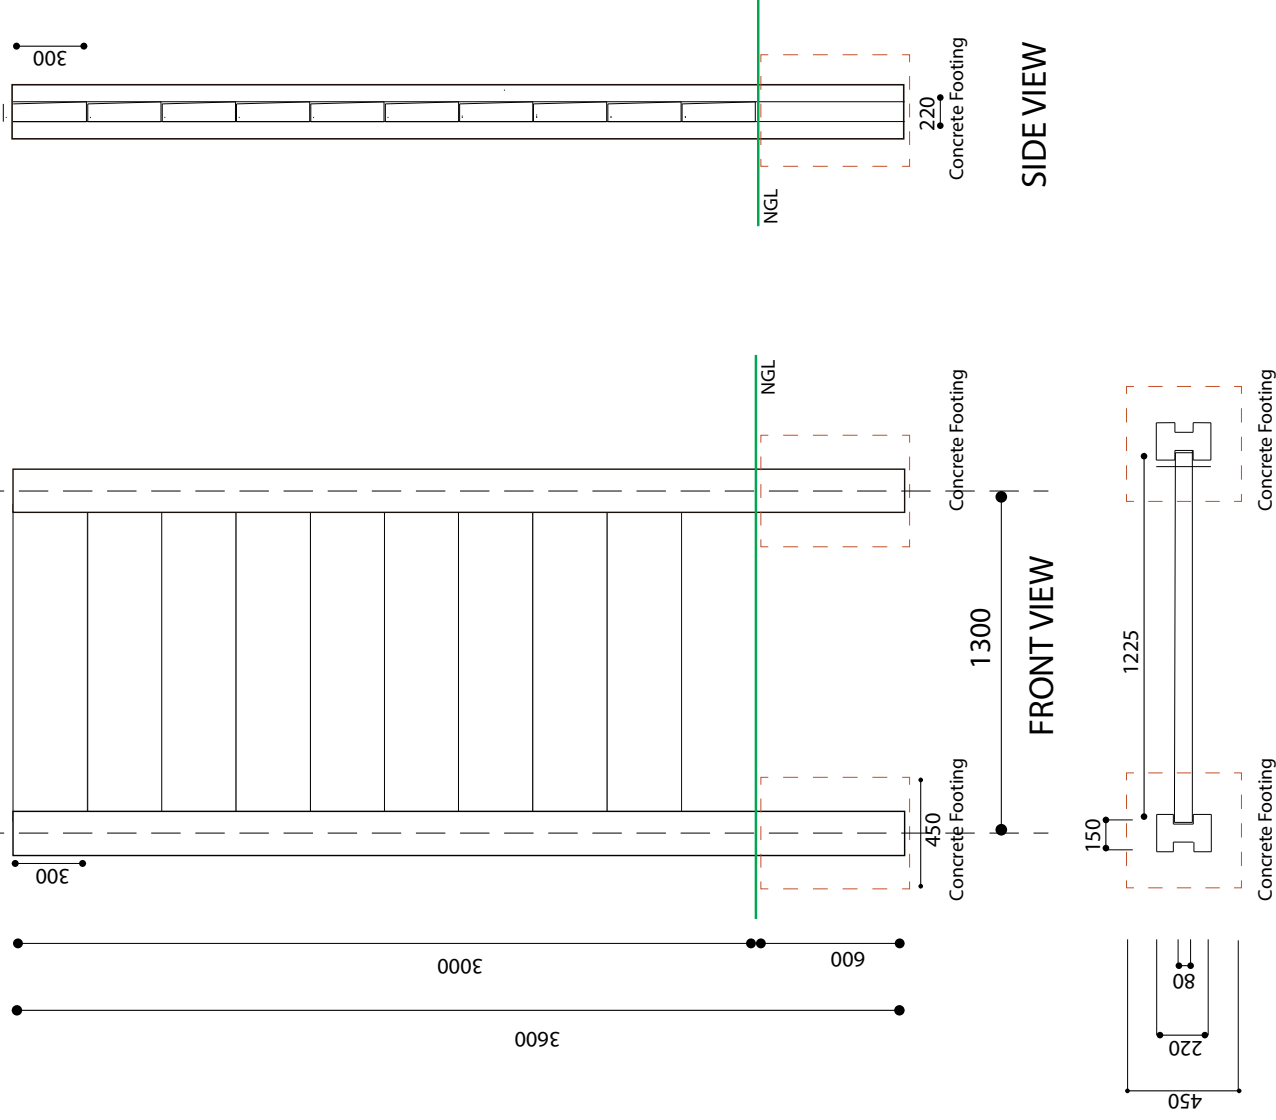

Posts	3600 x 150 x 220
Slabs	1225 x 300 x 80
Concrete	Precast Items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep. Minimum of 15-20 mpa concrete.
	The posts are spaced 1300mm centers.
	The final structure to be grouted with sand / cement screed.
	Drainage as required.