


1.2m High Columbo Wall: 4 Slabs Per Section

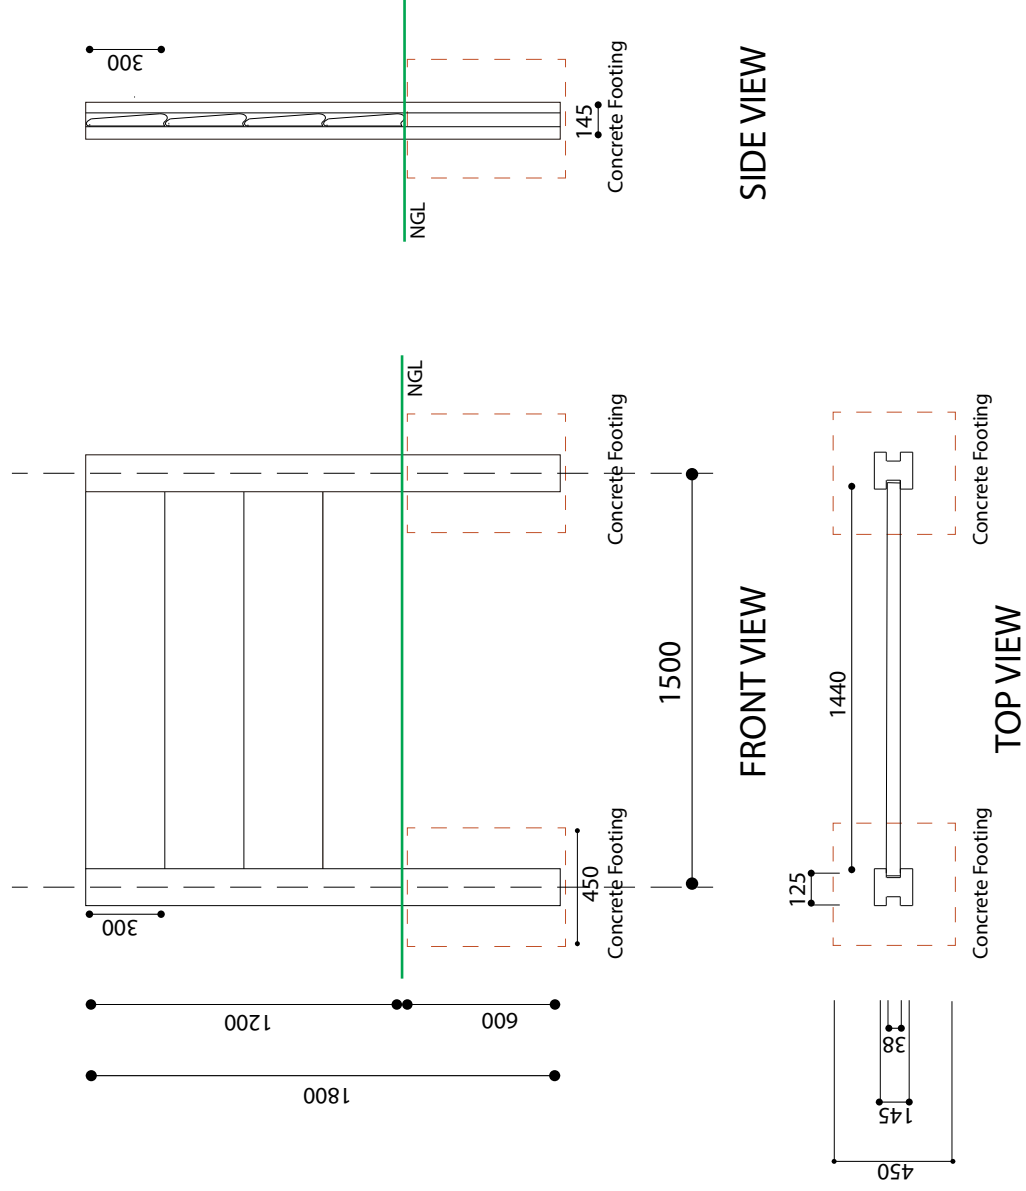

| | |
|--------------|--|
| Posts | 1800 x 125 x 145 |
| Slabs | 1440 x 300 x 55 |
| Concrete | Precast Items to be a minimum of 20-24 mpa at 28 days. |
| Installation | Foundations to be 450 x 450 x 600 deep. Minimum of 15-20 mpa concrete. |
| | The posts are spaced 1500mm centers. |
| | The final structure to be grouted top 2 slabs with sand / cement screed. |
| | Drainage as required. |