


2.1m High Columbo Wall: 7 Slabs Per Section



(Standard-width Posts)

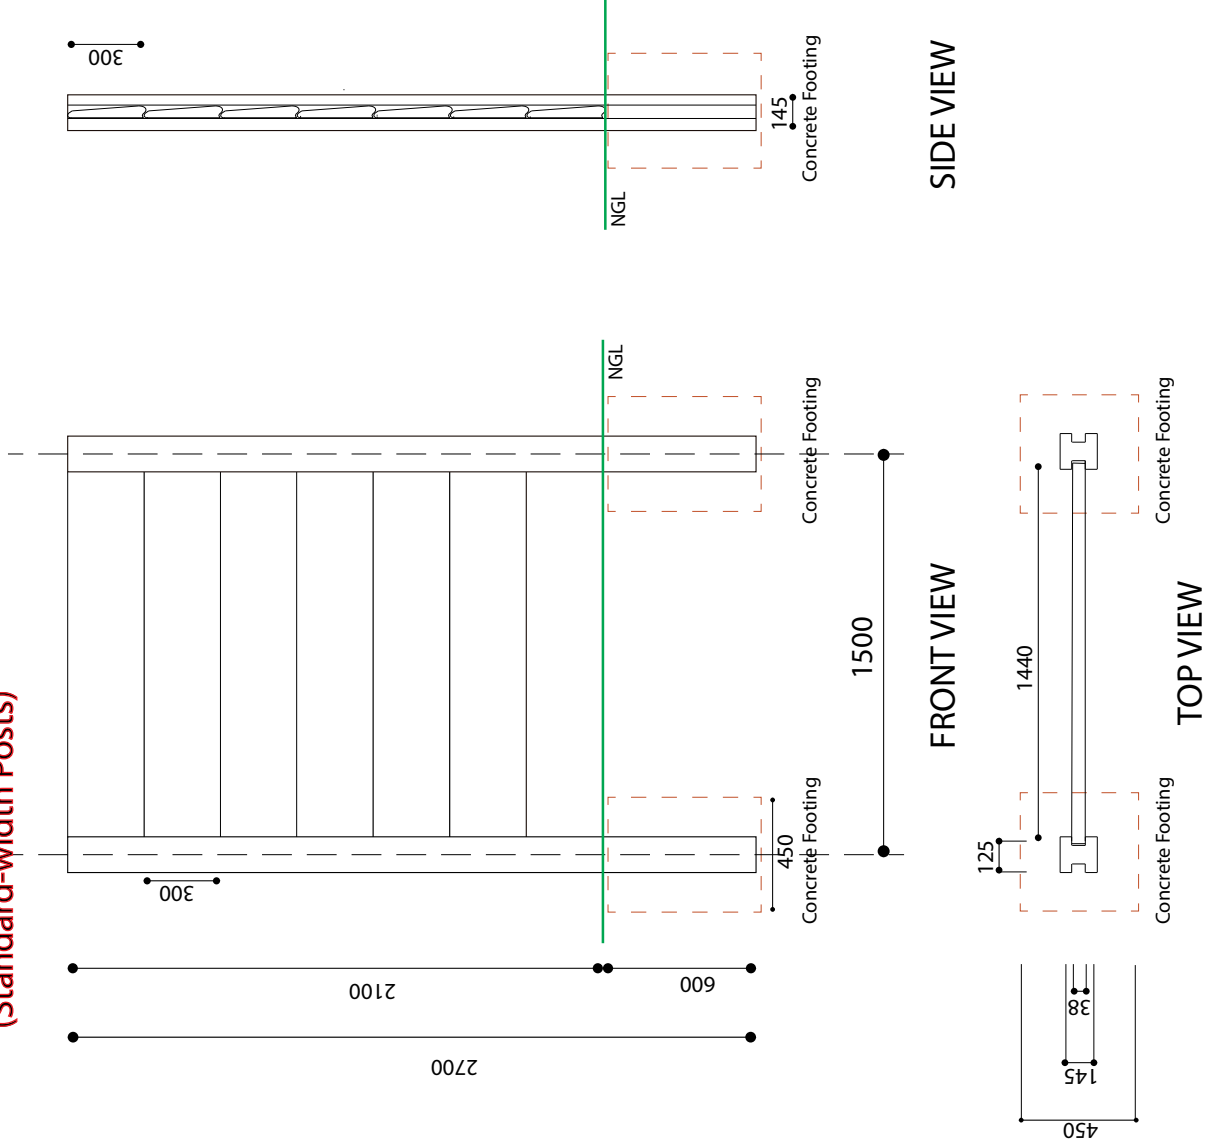

Posts	2700 x 125 x 145
Slabs	1440 x 300 x 55
Concrete	Precast Items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep.
	Minimum of 15-20 mpa concrete.
	The posts are spaced 1500mm centers.
	The final structure to be grouted top 2 slabs with sand / cement screed.
	Drainage as required.