


# 1.8m Columbo

## 1.2m Steel Palisade Insert, 2 Slabs Per Section

(Standard-width Posts)

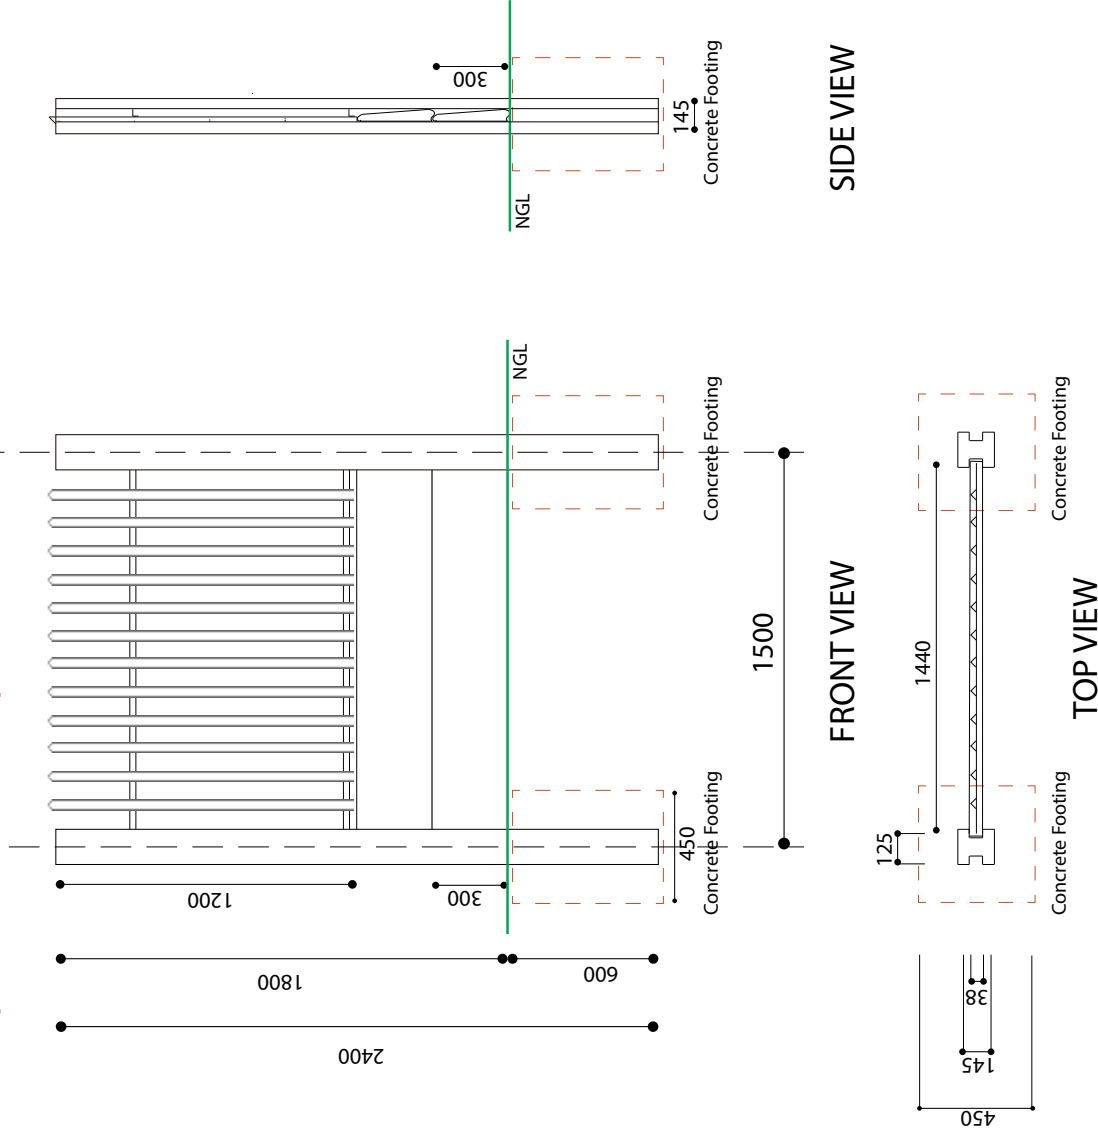

Posts	2400 x 125 x 145
Slabs	1440 x 300 x 55
Concrete	Precast items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep. Minimum of 15-20 mpa concrete.
	The posts are spaced 1500mm centers.
	The final structure to be grouted with sand / cement screed.
	Drainage as required.
Steel Panels	1200 x 1440
	12 Pales. 25x3 Angle Iron (80 gaps)
	2 Horizontals. 25x3 Angle Iron