


1.8m Columbo 1.2m Steel Palisade Insert, 2 Slabs Per Section

(Double-width Posts)

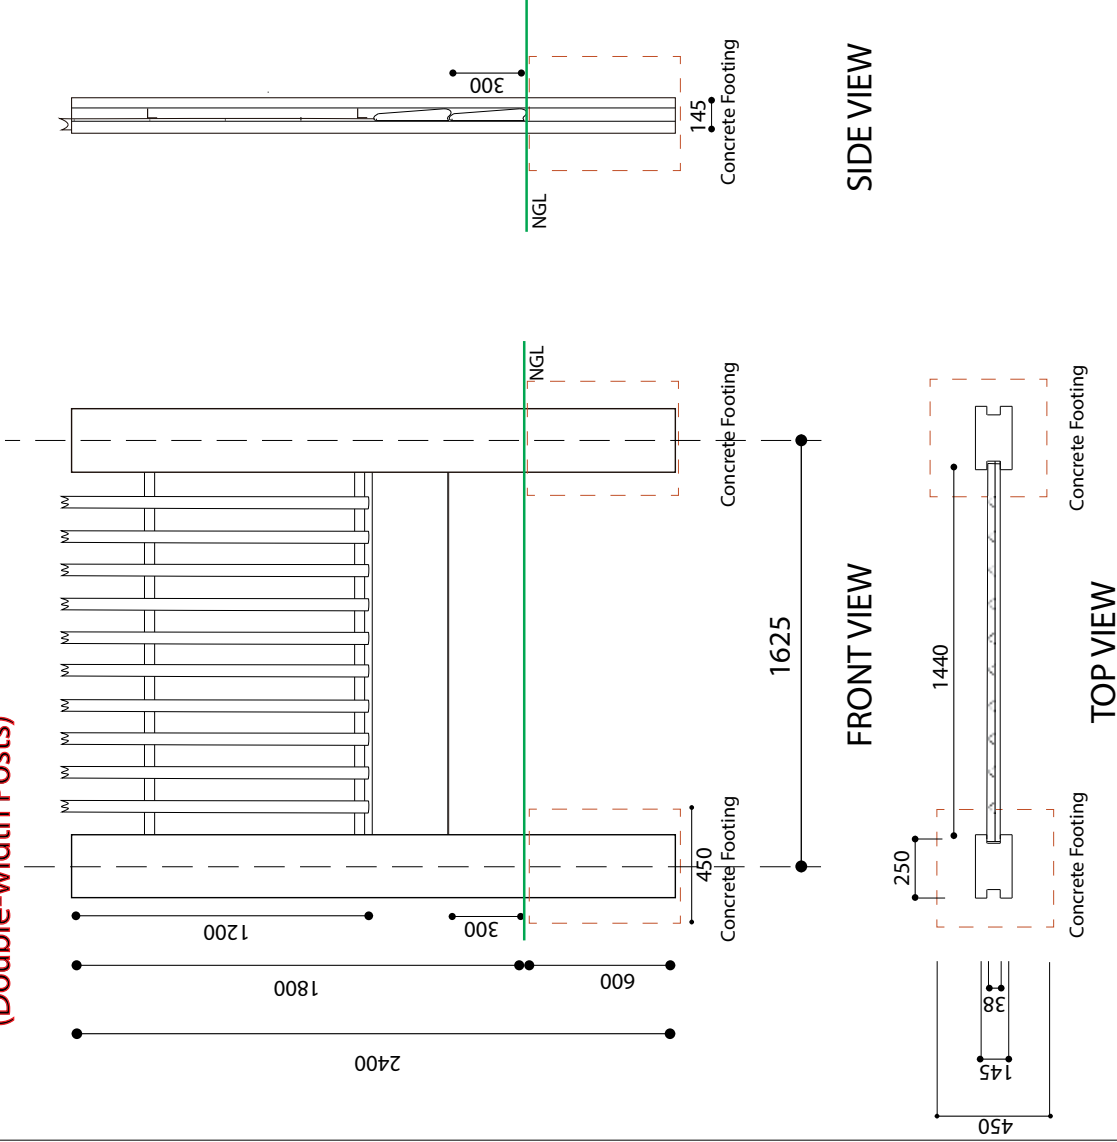

Posts	2400 x 250 x 145
Slabs	1440 x 300 x 55
Concrete	Precast Items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep. Minimum of 15-20 mpa concrete.
	The posts are spaced 1625mm centers.
	Concrete Footing
	The final structure to be grouted with sand / cement screed.
	Drainage as required.
Steel Panels	1200 x 1440
	10 Pales. 40x2-2.5 Devils Fork (80 gaps)
	2 Horizontals. 40x3 Angle Iron