


2.1m Columbo

1.5m Steel Palisade Insert, 2 Slabs Per Section

(Double-width Posts)

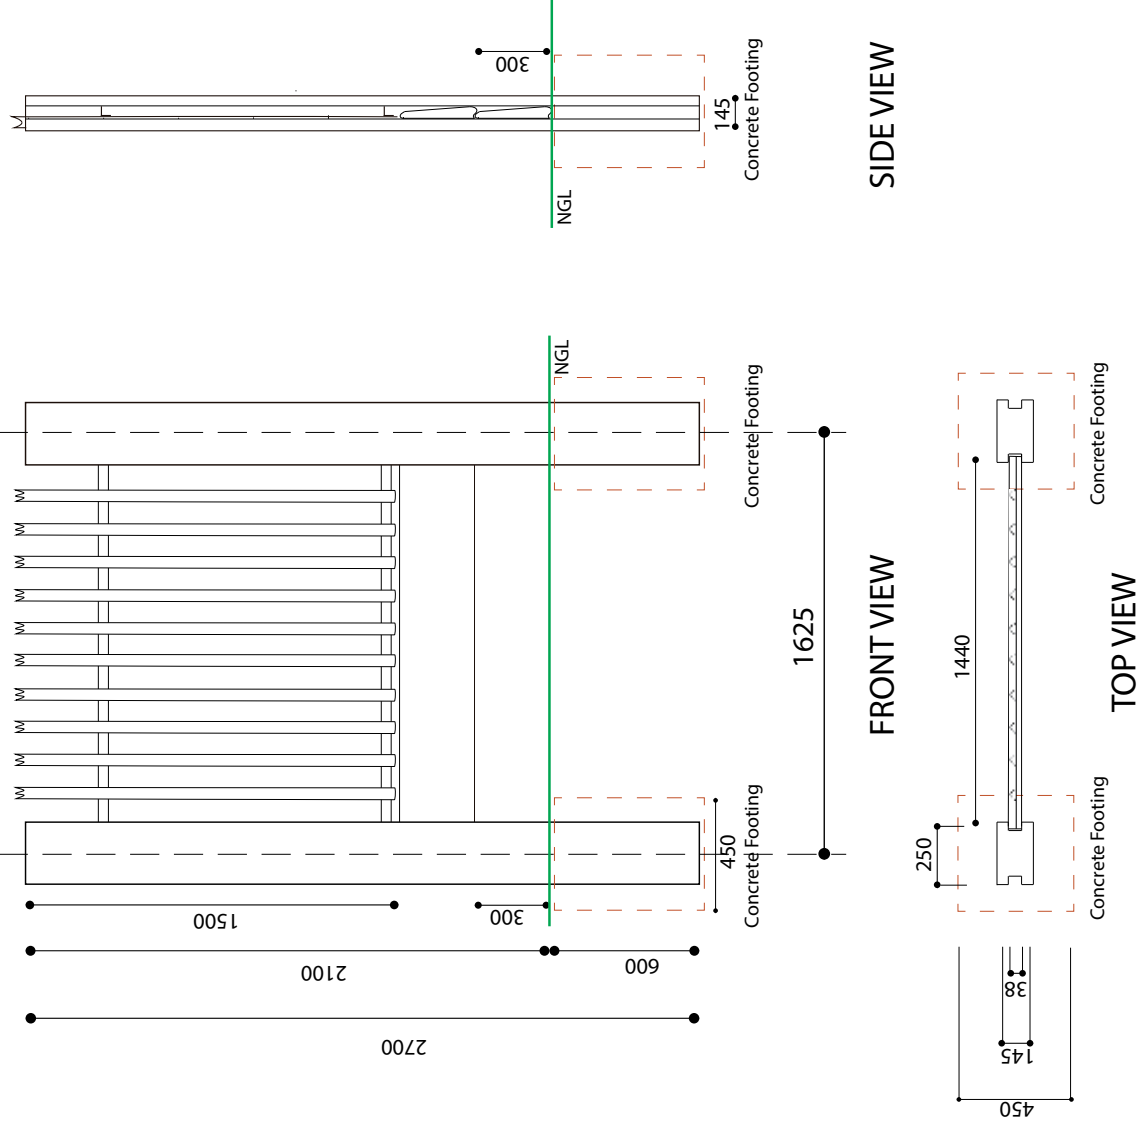

| | |
|--------------|--|
| Posts | 2700 x 250 x 145 |
| Slabs | 1440 x 300 x 55 |
| Concrete | Precast Items to be a minimum of 20-24 mpa at 28 days. |
| Installation | Foundations to be 450 x 450 x 600 deep. |
| | Minimum of 15-20 mpa concrete. |
| | The posts are spaced 1625mm centers. |
| | The final structure to be grouted with sand / cement screed. |
| | Drainage as required. |
| Steel Panels | 1500 x 1440 |
| | 10 Pales. 40x2-2.5 Devils Fork (80 gaps) |
| | 2 Horizontals. 40x3 Angle Iron |