




**2.4m Columbo**  
**1.8m Steel Palisade Insert, 2 Slabs Per Section**  
**(Double-width Posts)**

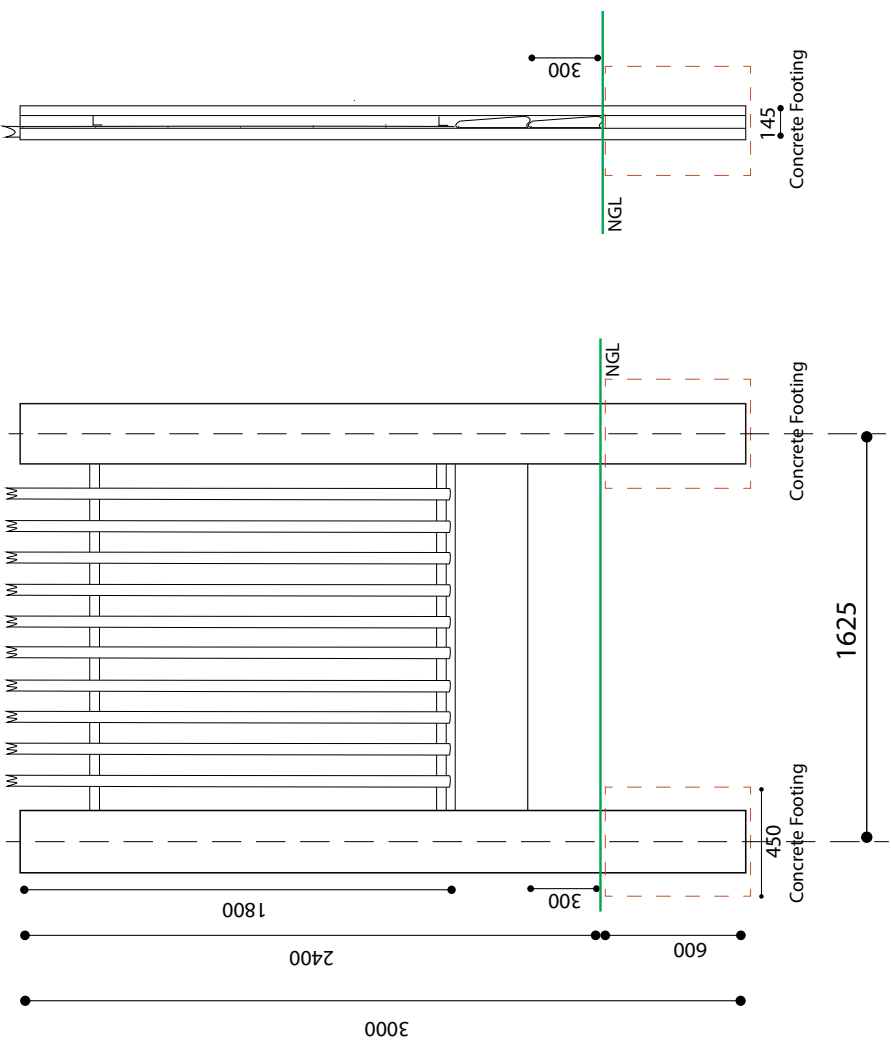

Posts	3000 x 250 x 145
Slabs	1440 x 300 x 55
Concrete	Precast items to be a minimum of 20-24 mpa at 28 days.
Installation	Foundations to be 450 x 450 x 600 deep.
	Minimum of 15-20 mpa concrete.
	The posts are spaced 1625mm centers.
	The final structure to be grouted with sand / cement screed.
	Drainage as required.
Steel Panels	1800 x 1440
	10 Pales. 40x2-2.5 Devils Fork (80 gaps)
	2 Horizontals. 40x3 Angle Iron